

IKD 1

Digital I/O Expansion Board

APPLICATIONS

The IKD 1 is a smart solution to increase numbers of digital I/O's to Woodward easYgen series controllers and GCP-31/32 packages equipped with option SC10 or SC09. It is possible to connect one or more IKD 1 units to the genset controllers (see table *Related Products* below).

Each of the inputs can be assigned a name, alarm class, NO/NC configuration and time delay. The name and class are displayed on the connected genset controller's display.

The IKD 1 output relays are controlled over the CAN bus connection from the main genset controller. Configuration of the IKD 1 is performed through the relay manager in the main controller and transmitted to the IKD 1.

A direct configuration cable (DPC) and software can be purchased for use with a PC or laptop and may be advisable for extensive configuration applications or where several similar units are to be set up.

Related Products

	max. # of IKD 1
• GCP-3... XPQ+SC09	2
• GCP-3... XPQ+SC10	2
• easYgen-1000 series	2
• easYgen-2000 series	2
• easYgen-3100P1/3200P1	2
• easYgen-3100P2/3200P2	4
• easYgen-3400/3500P2	4

DESCRIPTION

Features

- 8 configurable discrete alarm inputs
- 8 configurable FORM C relays with potential free contacts
- Configurable delays for each input
- CAN bus communication
- The discrete inputs transfer their status via CAN bus to the control unit.
- The control unit evaluates the status of these discrete inputs coming from the IKD 1 and depending on the configuration of the control unit, will take the appropriate action.
- The control unit can send commands via the CAN bus to remotely control the output relays of the IKD 1.
- The IKD 1 can be used with other manufacturer's controllers. Consult product manual 37135 for information regarding the address assignments of the CAN bus interface.

Product Number P/N

- 8440-2028

- 8 discrete inputs
- 8 relay outputs FORM C
- PC configurable¹⁾
- CAN bus communication
- Microprocessor technology for accurate, repeatable and reliable operation
- CE marked
- UL/cUL Listing

¹⁾ Use software *LeoPC* for configuration

SPECIFICATIONS

Power supply 12/24 Vdc (6 to 36 Vdc)
 Intrinsic consumption max. 3 W
 Ambient temperature -40 to 85 °C
 Ambient humidity 95 %, non-condensing

Discrete inputs isolated
 Input range 12/24 Vdc (6 to 32 Vdc)
 Input resistance approx. 6.8 kΩ

Relay outputs isolated
 Contact material AgCdO
 Load (GP) 2.00 Aac@250 Vac
 2.00 Adc@24 Vdc / 0.36 Adc@125 Vdc / 0.18 Adc@250 Vdc
 Pilot duty (PD)
 1.00 Adc@24 Vdc / 0.22 Adc@125 Vdc / 0.10 Adc@250 Vdc

Service interface
 Version RS-232

CAN interface isolated
 Insulation voltage (continuously) 100 Vac
 Insulation test voltage (≤ 5 s) 1,000 Vac
 Version CAN bus

Housing
 DIN-rail mounting extrusion profile Um 122
 to snap-on on a DIN rail/C-profile
 168 x 128 x 51 mm


Connection screw/plug terminals 2.5 mm²

Weight approx. 360 g
 Protection system IP 20

Disturbance test (CE) tested according to
 applicable EN guidelines

Listings UL/cUL, GHOST-R


DIMENSIONS

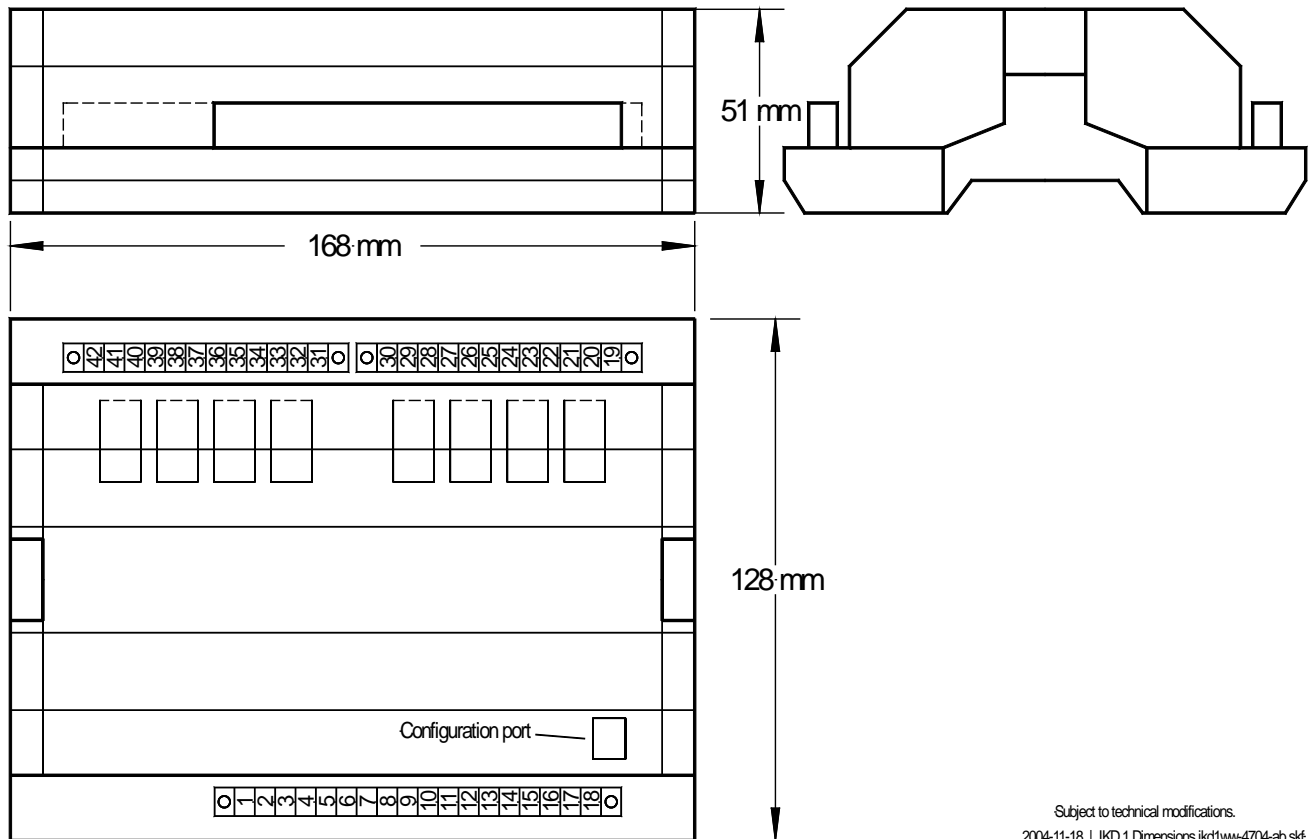

Subject to technical modifications.
 2004-11-18 | IKD 1 Dimensions ikd1ww-4704-ab.skf

Woodward Headquarters
 PO Box 1519
 Fort Collins CO, USA
 80522-1519
 1000 East Drake Road
 Fort Collins CO 80525
 Ph: +1 (970) 482-5811
 Fax: +1 (970) 498-3058

TYPICAL APPLICATIONS

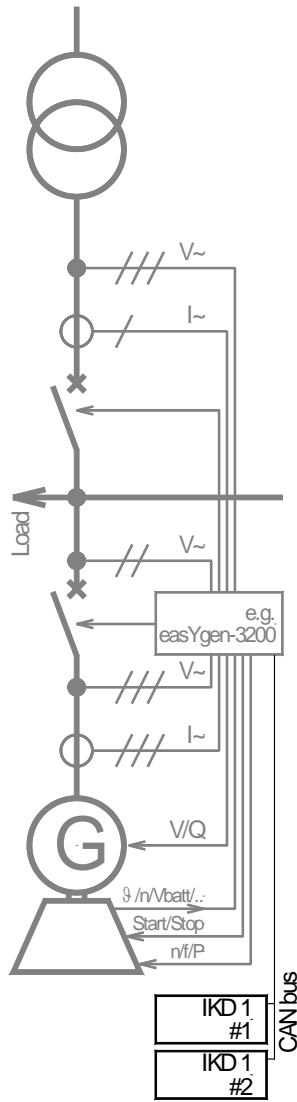

The digital inputs are read by the IKD 1 and transferred via the CAN bus to the control unit (incl. alarm class). Each alarm input may have a delay as well as the control logic (NO/NC) configured individually during set up. The status of the alarm input is monitored in the control device and will show the alarm text in its display. The alarm class assigned in the control device evaluates the alarm input and reacts accordingly.

The control device's relay manager controls the IKD 1 relays. The control logic for each IKD 1 relay can be programmed individually in the control device. Logical commands can be configured using internal events as well as the status of the digital inputs coming from the IKD 1.

If a discrete input on the IKD 1 is enabled, the control device displays a text message and the control functions of the alarm class are executed (refer to all manuals relating to the control device). The control device must operate the IKD 1 relays.

www.woodward.com

For more information contact:

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to stgt-doc@woodward.com

© Woodward, 2012

All Rights Reserved

37171C - 2012/6/Stuttgart

Contact

<p>North & Central America Phone: +1 970 498 3634 E-mail: SalesPGD_NAandCA@woodward.com</p>	<p>South America Phone: +55 11 3034 1120 E-mail: SalesPGD_SA@woodward.com</p>
<p>Europe Phone: +49 711 78954-510 E-mail: SalesPGD_EUROPE@woodward.com</p>	<p>Middle East & Africa Phone: +971 2 6275185 E-mail: SalesPGD_MEA@woodward.com</p>
<p>Russia Phone: +7 960 272 4205 E-mail: SalesPGD_RUSSIA@woodward.com</p>	<p>China Phone: +86 512 8818 5515 E-mail: SalesPGD_CHINA@woodward.com</p>
<p>India Phone: +91 22 2561 2256 E-mail: SalesPGD_INDIA@woodward.com</p>	<p>ASEAN & Oceania Phone: +49 711 78954-511 E-mail: SalesPGD_ASEAN@woodward.com</p>